


# HPW / HPC

Series Heat Pipe Heat Exchanger

## Feature

- Using heat pipe with high heat conductivity to ensure excellent heat exchange.
- Enclosed design to assure isolation of internal and ambient air.
- Compact design with light weight for easy transportation and installation.
- Dew proof from over-cooling.
- Easy to maintain and inspect.

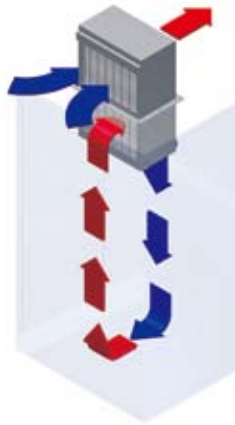

## Specification

Item / Model		HPC-15A		HPC-25A		HPC-35A		HPC-50A		HPC-70A		HPC-100A	
Heat dissipation W/°C		15		25		35		50		70		100	
Fan	Quantity	1x2		1x2		1x2		2x2		2x2		2x2	
	Voltage (ACV)	110	220	110	220	110	220	110	220	110	220	110	220
	Input (W)	35x2	35x2	35x2	35x2	35x2	35x2	35x4	35x4	35x4	35x4	35x4	35x4
	Rate current (A)/PC	0.43	0.29	0.43	0.29	0.43	0.29	0.43	0.29	0.43	0.29	0.43	0.29
Dimension WxDxH (mm)		260x165x382		305x175x382		305x200x412		414x200x412		441x200x472		565x525x492	

## Specification

Item / Model		HPW-05A		HPW-10A		HPW-15A		HPW-25A		HPW-35A		HPW-50A		HPW-70A		HPW-100A	
Heat dissipation W/°C		5		10		15		25		35		50		70		100	
Fan	Quantity	1x2		1x2		1x2		1x2		1x2		2x2		2x2		2x2	
	Voltage (ACV)	110	220	110	220	110	220	110	220	110	220	110	220	110	220	110	220
	Input (W)	20x2	20x2	20x2	20x2	35x2	35x2	35x2	35x2	35x2	35x2	35x4	35x4	35x4	35x4	35x4	35x4
	Rate current (A)/PC	0.21	0.129	0.21	0.125	0.43	0.29	0.43	0.29	0.43	0.29	0.43	0.29	0.43	0.29	0.43	0.29
Dimension WxDxH (mm)		250x72x480		250x72x580		250x80x780		295x90x780		295x90x860		414x90x940		440x120x970		565x120x100	